
Wood Bleach Concentrated Formula



- Bleaches uncoated wood.
- Removes black water spots and stains.
- Use to gently lighten wood for color matching.

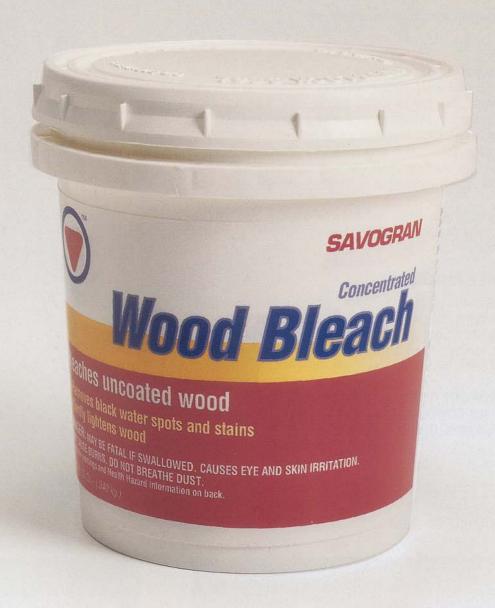

Wood Bleach

Description

Savogran Wood Bleach contains oxalic acid which when mixed with hot water effectively bleaches unfinished or stripped wood quickly and easily. The bleach lightens wood and is excellent for removing black water spots and tannin stains in wood.

Application

Use on all unfinished woodwork, floors, doors, etc.

Directions

DIRECTIONS: Before use, read all information on container. Protect eyes with goggles and wear rubber gloves. Protect skin from splashes. Wood must be free of paint, waxes, oils and dirt. Use Savogran paint removers and cleaners to remove coatings and dirt.

- Dissolve contents of package in one gallon of hot water.
- Apply hot solution with scrub brush. Apply liberally allowing solution to remain on surface until desired lightness has been achieved. If solution cools before job is finished, reheat but do not boil solution.
- Rinse repeatedly with clean water and allow to dry. Lightly sand dry surface. Surface must be clean and dry before refinishing or new finish may not adhere.

Important label information

DANGER: Contains oxalic acid. Avoid contact with skin and eyes. May cause burns or irritation. Harmful if swallowed. Do not breathe dust. DO NOT allow solution to get into gloves or soak through clothing to skin. Before use, always read all information and warnings on container. Material safety data sheets available upon request.

KEEP OUT OF REACH OF CHILDREN CLOSE CONTAINER AFTER EACH USE NEVER STORE IN UNLABELED CONTAINERS

Sizes:	Packed:	Universal Product Code:	Ship Wt:
12 oz.	12/case	0 4954210501 9	11 lbs.

